

HORIBA

Explore the future

ORGANIC POLLUTANT MONITOR **OPSA-150**

COD, BOD & TSS Monitoring by
UV - VIS Absorption

Organic Pollutant Monitor


Measurement of Organic Matter
at Water Source

Measurement of Organic Matter
on the Process Line



Continuous Measurements
with Low Maintenance

Large Measurement Range
of 0 to 5.0 Abs



ORGANIC POLLUTANT MONITOR

OPSA-150



The OPSA-150 is a new organic pollutant monitor that uses Horiba's proprietary Rotary Cell Length Modulation, a measuring technique incorporating 25 years of expertise. The unit can be used as an organic pollutant monitor at drainage systems for determining compliance with COD / BOD monitoring regulations, for monitoring quality of water measuring levels of organic matter at water supply intakes, and as an organic monitor on process lines (phenol meter).

*Pole mount, outdoor cover, and analysis panel are available as options.



Sensor that makes full use of Rotary Cell Length Modulation

- Zero drift correction is performed in every cycle of measurement. This correction can eliminate the effect of any interference on cells.
- Cell length modulation provides readings from multiple measurements, making available results from various cell lengths. This allows the single device to make measurements on a large range of concentrations from as low as 0 to 0.1 Abs, up to 0 to 5.0 Abs.



Easy-to-use Control Panel

Control of the OPSA-150 is operated via the intuitively designed touch panel. An interactive setup screen eliminates any doubts that a user may have while operating the unit. The Converted COD and BOD/TSS +TURB Display allow reading to be confirmed on site.



Automatic Data Recording up to One Year

Internal data memory provides data storage for one year in case of one measuring value per hour. A Compact Flash card can be used to allow easy transfer of data to a PC.



Horiba's Proprietary Wiper System

The cell is cleaned continuously by the wiper to eliminate any interference in the measurement light path. Therefore, errors in readings from dirty cells, or differences in results before and after cleaning are not evident.


Sample Failure Switch Input

The sample error alarm provided as an option on the previous OPSA-120 is now a standard feature.

Ten Times Increase in Analysis Sensitivity

The minimum accuracy of analysis ability has been increased to 0.0001 Abs, a ten-fold increase over the previous OPSA-120 unit. Measurements can be made on concentrations as low as 0 to 0.1 Abs.


Cell Length Modulation System

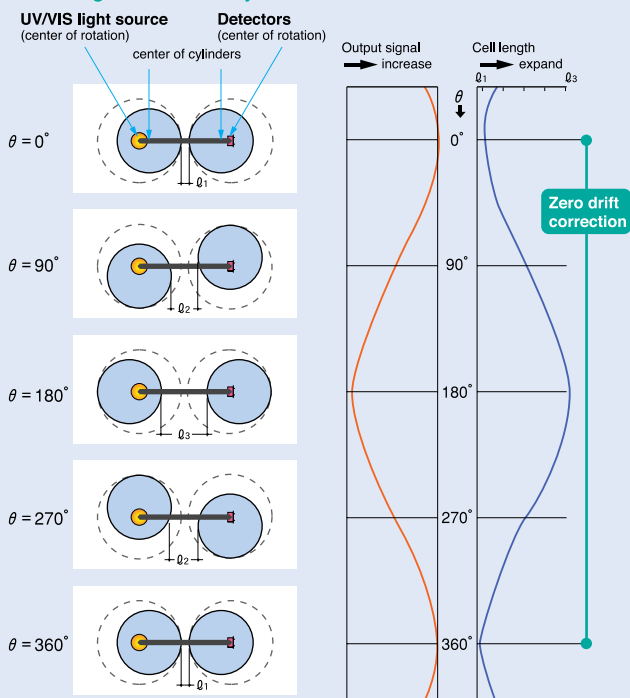

Specifications ☆ BOD is specially developed & designed in INDIA for INDIA

Name	Organic Pollutant Monitor
Model name	OPSA-150
Measurement items	UV absorbance, VIS absorbance, Converted COD, BOD & TSS / TURB (turbidity) - Optional
Principle	UV-Vis Spectroscopy.
Measurement wavelength	UV Multi-Spectrum
Measurement Range	COD (0-5000 ppm), BOD (0-5000 ppm), TSS (0-5000 ppm), * Range can be easily customized as per requirement
Construction of analysis section	Rotary type
Range (Equivalent to a cell length of 10 mm)	UV absorbance / VIS absorbance 0 to 0.1 Abs - 0 to 5.0 Abs (Can be set 0.1 Abs increments)
Resolution	0.0001 Abs (Can be set to 0.001 Abs)
Repeatability	Within ±2% of full scale (within ±5% if full scale is 2.6 to 5.0 Abs)
Linearity	Within ±2% of full scale (within ±5% if full scale is 2.6 to 5.0 Abs)
Stability	Within ±2% of full scale in 24 hours (within ±4% in 24 hours if full scale is 2.6 to 5.0 Abs)
Response time	T ₉₀ within 1 minute (flow rate of 5 L/min)
Cleaning method (cleaning cycle)	Automatic cleaning via wipers (continuous cleaning)
Display methods	LCD display: 320 x 240 monochrome crystal display with backlight (touch panel type) Display details: UV absorbance, VIS absorbance, UV-VIS absorbance (Absorbance can be changed to absorption constant (SAC: m ⁻¹), Converted COD level, Converted turbidity level BOD + TSS
Calibration method	Solution calibration (calibration solution inserted in ampule) via zero solution, span solution (single touch calibration)
Sample conditions	Temperature: 2 to 40°C* Sample flow rate: Minimum 2 L/min, Maximum 20 L/min * Use a heating device to prevent sample freezing.
Ambient conditions	Ambient temperature: 0 to 40°C, Ambient humidity: 85% or less
Analog output	No. of outputs: 3 outputs (standard) Type: Up to 3 can be chosen from UV absorbance, VIS absorbance, UV-VIS absorbance, Converted COD & BOD level, and Converted TSS level outputs Specification: DC 4-20 mA, or DC 0-16 mA, isolated output (no isolation between each channel), maximum resistance load: 600 Ω
Alarm and status outputs	No. of outputs: 6 outputs (standard) Type: Up to 4 can be chosen from power failure, maintenance (standard and fixed), batch alarm, COD / BOD maximum limit alarm, TSS / TURB limit alarm (standard), light source error, sample failure, cleaning motor error, and analyzer error outputs Details: Power failure...occurs when power fails Total alarm...cleaning motor error, light source error, analyzer error Maintenance...occurs when entering maintenance or correction mode, or when the maintenance switch has been turned on Specification: Dry contact output, NO contact Contact rating: AC 125 V 0.3 A, DC 30V 1 A (with resistance load) Each output has an independent COM interface
Contact input	No. of inputs: 2 inputs (standard) Type: Sample failure float switch input, time correction input Specifications: No-voltage contact input (can connect to open collector), isolated input On resistance: Maximum 100 Ω, Open voltage: DC 26 V, Short circuit current: 13 mA
Communication	Interface: RS-232C Compatible Communication speed: 19200 bps
Data memory	Values of measurement items are stored in the main unit's data memory. Data can also be transferred to a Compact Flash card. Memory interval: 1 minute or 1 hour Memory save time: Every hour* Data memory capacity: 1 minute intervals...for 10 day's data, 1 hour intervals...for 1 year's data * The most recent data is saved to memory.
Light source / Detector	Light source: Low pressure mercury lamp / Detector: Silicon photo cell
Tubing connections	Sample entry: Rp-1/2 socket Bypass outlet: Rc-1/2 socket Overflow outlet (2): 20 A nominal diameter socket Overflow outlet (1): 13 A nominal diameter socket Drain outlet: 50 A nominal diameter socket Drain outlet: Rc-1/2 socket
Construction	For outdoor installation
Material of parts in contact with sample	SUS, PVC, PP, CR, SiO ₂
Power source	AC 100 V to AC 230 V ±10%, 50/60 Hz
Power consumption	AC 100 V to AC 120 V: 45 VA maximum AC 200 V to AC 230 V: 60 VA maximum
Weight	Operating section: Approx. 5.0 kg Analyzer section: Approx. 5.6 kg
External dimensions	Operating section: 240 (W) x 104 (D) x 320 (H) Analyzer section: 200 (W) x 180 (D) x 403 (H) (units: mm) (excludes protruding sections)
Color/Finish	Munsell 5PB8/1
Installation conditions	<ul style="list-style-type: none"> ● Install on a flat stable surface away from sources of vibration and shocks. ● Ambient air must not contain dust, mist or corrosive gases. ● Use at atmospheric pressure. ● Out of direct sunlight. ● An area with good air circulation. ● An altitude of less than 2000 m.

Dimensional Outline (Unit: mm)

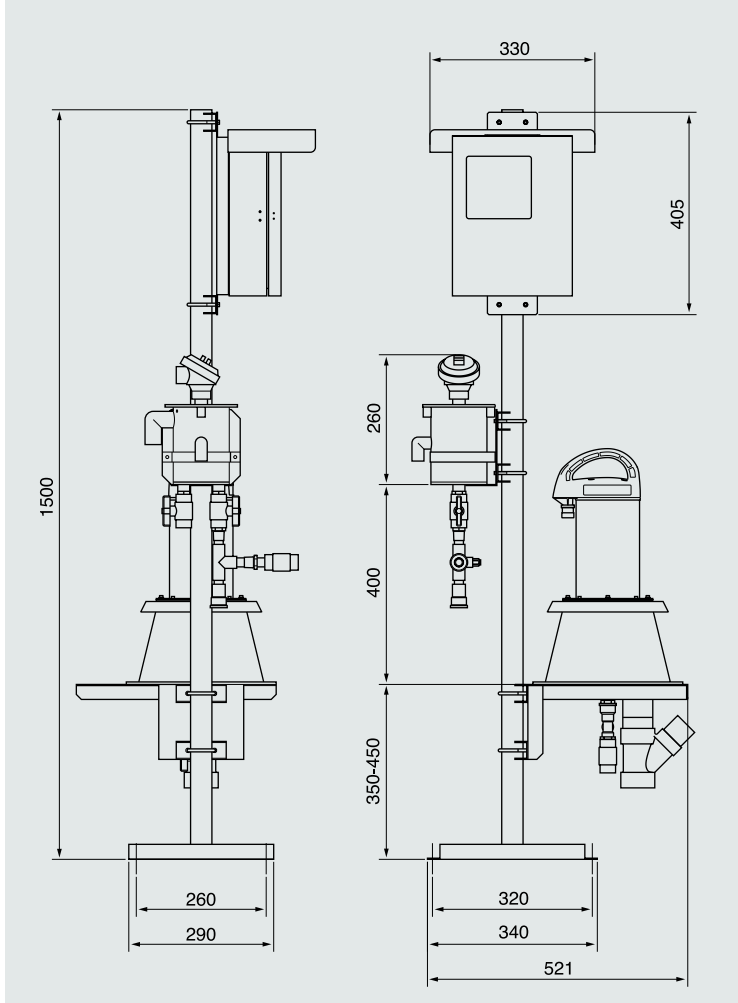

★ ONLINE PH MONITOR:

HP-480

(Panel mounted type)



HP-480 Specifications

Measuring method	Glass electrode method
Model name	HP-480
Measuring range	pH 0 to 14; Resolution 0.01 pH Temperature 0 to 100; Resolution 1°C (selectable display)
Repeatability	±0.05 pH (for equivalent input)
Transmission output	4 to 20 mA DC Input/output insulated type Maximum load resistance 900 Ω
Transmission output range	Freely settable within Measuring range
Contact output	Output points: 2 points (R1, R2) Contact format: Relay contact SPDT (1c) Contact capacity: 240 V AC 3 A, 30 V DC 3 A (resistance load) Contact function: Selectable from upper, lower limit operation (ON/OFF control) and malfunction alarm, maintenance operation
Calibration function	· Two point automatic calibration and manual calibration · Two point automatic calibration: Automatic potential stability assessment Standard solution: Combination of pH 2, 4, 9, 10 (JIS) and pH 7 (JIS) Manual calibration: Freely settable, difference of 2 pH or more · Temperature calibration (1 point)
Hold function	Selectable from preceding hold, specified value hold, continuous operation
Self-diagnosis function	· Calibration failure · Asymmetric potential error, sensitivity error, response speed error, standard solution error · Electrode diagnosis · Temperature sensor short-circuit, temperature sensor disconnection · Outside measurement range · Converter malfunction
Temperature compensation range	0 to 100°C
Temperature compensation element	Selectable from 500 Ω, 6.8 kΩ, 1 kΩ, 10 kΩ, 350 Ω, no compensation
Ambient temperature	-5 to 45°C
Power supply	AC 100 to 240 V ±10% 10 VA (max.)
Compatible standard	CE marking, FCC regulations

Horiba continues contributing to the preservation of the global environment through analysis and measuring technology.



Please read the operation manual before using this product to assure safe and proper handling of the product.

- The contents of this catalog are subject to change without prior notice, and without any subsequent liability to this company.
- The color of the actual products may differ from the color pictured in this catalog due to printing limitations.
- It is strictly forbidden to copy the content of this catalog in part or in full.
- All brand names, product names and service names in this catalog are trademarks or registered trademarks of their respective companies.

HORIBA India Pvt. Ltd.

246, Okhla Industrial Estate, Phase-III, New Delhi -20, India,
Tel.: +91 11 46465000, Fax.: +91 11 46465020,
Toll Free No. 1800 - 103-4470

P ne

502, 5th Floor, Purushottam Plaza, Baner Road, Pune-411045
Tel. : +91 (20) 4076 6000 Fax. : +91 (20) 4076 6010

Bangalore

Kamadhenu, No. 17/1 - 32, Bannerghatta Road,
Audugodi, Bangalore- 560030, Tel. : +91 (80) 2221 0071

<http://www.horiba.com> e-mail: pe_hin_in@horiba.com

● **HORIBA, Ltd.**

Head Office
Miyano Higashi, Kisshoin
Minami-ku, Kyoto, Japan
Phone: 81 (75) 313-8123
Fax: 81 (75) 321-5725

Tokyo Sales Office
1-7-8 Higashi-Kanda
Chiyoda-ku, Tokyo, Japan
Phone: 81 (3) 3861-8231
Fax: 81 (3) 3861-8259

TAIWAN Representative Office
3F, NO.18 Lane 676, Chung
Hua Rd, Chupei City,
Hsinchu Hsien, 302, Taiwan
Phone: 886 (3) 656-1012
Fax: 886 (3) 656-8231

● **HORIBA TRADING (SHANGHAI) CO., Ltd.**

Shanghai Office
Room 1103, United Plaza,
1468 Nanjing Rd. West,
Shanghai, 200040, China
Phone: 21-3222-1666
Fax: 21-6289-5553

Beijing Office
Room 609, Jin Bao Plaza,
89 Jin Bao Street,
Dongcheng District, Beijing,
100005 China
Phone: 10-6522-7573
Fax: 10-6522-7582

● **HORIBA KOREA Ltd.**

112-6 Sogong-Dong
Choong-ku, Seoul, Korea
Phone: 82 (2) 753-7911
Fax: 82 (2) 756-4972

● **HORIBA INSTRUMENTS Pte. LTD.**

10 Ubi Crescent
#05-11/12, Ubi Techpark
Singapore 408564
Phone: 65 6745-8300
Fax: 65 6745-8155

● **HORIBA INSTRUMENTS INCORPORATED Irvine Facility**

17671 Armstrong Avenue
Irvine, CA 92614, U.S.A.
Phone: 1 (949) 250-4811
Fax: 1 (949) 250-0924

Ann Arbor Facility
5900 Hines Drive
Ann Arbor, MI 48108
U.S.A.
Phone: 1 (734) 213-6555
Fax: 1 (734) 213-6525

● **HORIBA / STEC INCORPORATED**

1080 E. Duane, Suite. A
Sunnyvale, CA 94086
U.S.A.
Phone: 1 (408) 730-4772
Fax: 1 (408) 730-8975

● **HORIBA GmbH**

Kaplanstrasse 5
A-3430 Tulln,
Austria
Phone: 43 (2272) 65225
Fax: 43 (2272) 65230

HORIBA CZECHIA
Organizaci slozka Praha
Petrohradská 13
CZ-101 00 Praha 10, Czech Republic
Phone: 420 (2) 717-464-80
Fax: 420 (2) 717-470-64

● **HORIBA INSTRUMENTS LIMITED**

Kyoto Close
Summerhouse Road
Moulton Park, Northampton
NN3 6FL, U.K.
Phone: 44 (1604) 542500
Fax: 44 (1604) 542699

● **HORIBA EUROPE GmbH**

Head Office
Hans-Mess-Str.6
D-61440 Oberursel/Ts.
Germany
Phone: 49 (6172) 1396-0
Fax: 49 (6172) 137385

Leichlingen Facility
Julius-kronenberg Strasse
D-42799 Leichlingen
Germany
Phone: 49 (2175) 8978-0
Fax: 49 (2175) 8978-50

● **HORIBA FRANCE**

12, Avenue des Tropiques
91955 LES ULIS
France
Phone: 33 (1) 69-29-96-23
Fax: 33 (1) 69-29-95-77

● **HORIBA SWEDEN**

Hertig Carlsväg 55-57
S-15138 Södertälje
Sweden
Phone: 46 (8) 550-80701
Fax: 46 (8) 550-80567

● **HORIBA ITALY**

Europalace
Corso Torino 43/45
10043 Orbassano, Torino, Italy
Phone: 39 (011) 9040601
Fax: 39 (011) 9000448

Printed: By Horiba India